

FLATMAX EDGE LIT LED 1X4 PANEL



A high performance LED flat panel designed to lay in to drop ceilings; typically used to replace 2'x 2' and 2'x 4' fluorescent fixtures. Suitable for office, school, hospital and medical facility applications. Panels are fully dimmable, and are compatible with building controls, motion sensors, timers, and daylight harvesting systems.

The design of the panels produces an even, consistent shadowless light. The LEDs mean long life, high lumen maintenance, high CRI, and low maintenance, with no hazardous materials.

PROJECT NAME

CATALOG NUMBER

NOTES

FIXTURE
TYPE

For non-standard/architectural T-bar ceiling systems (i.e., "Donn Fineline"), please CONSULT FACTORY

FEATURES:

- Lumens: 3500K: 3680/ 5000K: 4050* Lumens
- 45 Watts
- 3500K or 5000K
- 50,000 Hour Life (L70)
- 8 Lbs
- 0-1-10V dimming; IR Remote dimming option
- 5 Year Warranty
- CRI >80
- Optional remote power supply as required
- Surface mount and suspension kits available
- LM79 Test data available
- Also available in 2X2 and 2X4
- MRI compliant option available, contact MaxLite for information



CONTROL:

- Standard discrete driver on back
- Up to 20 panels can be linked from a master panel (IR) or Wall Dimmer for control
- Panels can be linked in series at 1.0-1.3A Surge each, in qty up to service limit for power

CONSTRUCTION:

- The housing and back panel are aluminum providing heat sink and thermal control capabilities
- Lens is translucent white polycarbonate
- Profile including the control box is 2 inches
- Unique mounting gives flush-fit in drop ceiling
- Modular construction for easy replacement

Accessories:

| Model Number | Short Description |
|--------------|-------------------|
| MLCHKSQ | Cable hung kit |
| MLSMKFP14E | Surface mount kit |

Luminaire Ordering Information:

Typical Order Example: MLFP14E4535

| CLASS | SIZE | OPTICS | WATTAGE | COLOR | FINISH | OPTIONS | VERSION |
|--------------------------------|-----------|-------------|--------------|--------------------------|--------------------------|--|-----------|
| MLFP= Square shaped flat panel | 14= 1'X4' | E= Edge Lit | 45 = 45 Watt | 35 = 3500K 50 = 5000K | Blank= White Standard | = No options RD= Remote Driver EM= Emergency Backup MR = MI Compliant | = 1st Gen |

MAX12155

Option Descriptions:

Remote Driver: Allowing for an installation depth of just 2 inches,

Emergency Battery Backup: 90 min. @ 30% output

***Preliminary Data at time of printing, contact Factory for Final LM-79 Report Installation Instructions, LM-79 Testing, IES Files available online:**



FLATMAX EDGE LIT LED 1X4 PANEL



SPECIFICATIONS:

| Item | Specification | Details | |
|---------------------|-------------------------|---|---------|
| General Performance | Spacing Criteria | Available upon request | |
| | Color Temperature | 3500K | 5000K |
| | Lumens | 3680 | 4050* |
| | Efficacy | 81LM/W | 90LM/W* |
| | Color Consistency | Proprietary binning for uniform color | |
| | Lumen Maintenance (L70) | 50,000 hours | |
| Electrical | Power Factor | Over 96% | |
| | Input Voltage | 120V-277V 50/60 Hz | |
| | Power Consumption | 45 Watts | |
| Control | Dimming | 0-1-10V Dimming: IR Remote Dimming Option | |
| | Linking Lengths/Qty | 15' x 20 Panels | |
| Physical | Dimensions | 11.8" x 47.8" x 2" | |
| | Weight | 8 Lbs | |
| | Housing | Aluminum | |
| | Optics | Light Refraction/Acrylic Diffusion | |
| | Mounting | Fits standard grid for drop ceilings | |
| | Operating Temperature | -20°F to 130°F | |
| | Humidity | 20% - 85% RH, non condensing | |
| Certification | Certification | ETL, cETL | |
| | Material Usage | RoHS compliant; no mercury | |
| | Environment | Indoor Use | |
| | LED Class | L70 rated to 50,000 hours | |

MASTER / REMOTE:

Each panel can be wired as a Master or Satellite unit. During mounting, one fixture in the room should be wired as Master, and the others in the room should be wired as "Satellites". Dimming connections can be made with two conductor "20 Ga. Bell Wire".

ROOM CONTROL:

When all the units are joined, one remote control aimed at the Master Unit will control all the other units in the room, up to a maximum of 20 units. With one click, all the units can be turned on, dimmed and turned off. The Master Unit controls the whole room, up to 20 fixtures.


BUILDING CONTROL:

Multiple panels can also be controlled from a single source. For information and specifications on either linking more than 20 panels or on integrating with a central building control system, please contact MaxLite.

Lighting layouts and spacing criteria available upon request

*Preliminary Data at time of printing, contact Factory for Final LM-79 Report

DIMENSIONS:

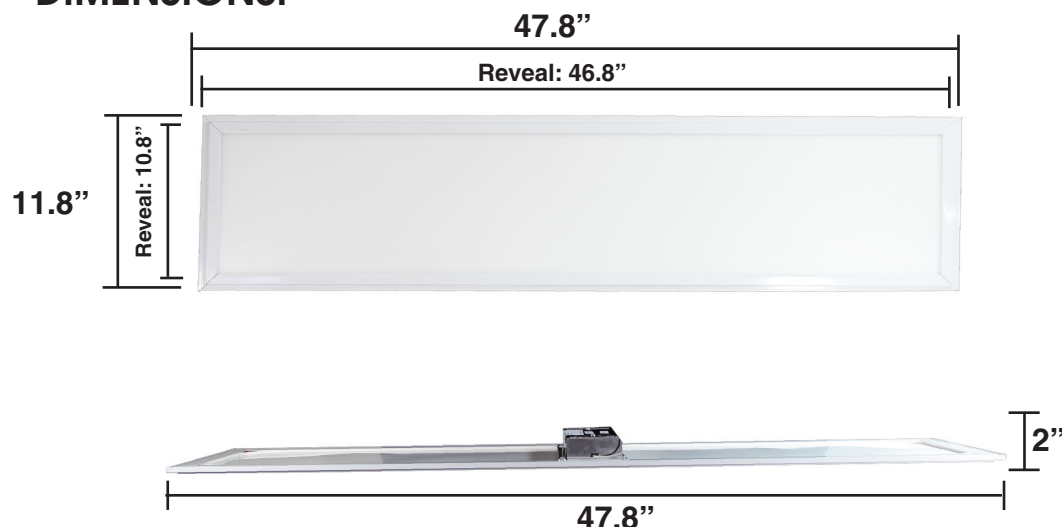

Installation Instructions, LM-79 Testing, IES Files available online:


MaxLite®: 1-800-555-5629 | Fax: 973-244-7333 | Web: www.maxlite.com | E-mail: info@maxlite.com



FLATMAX EDGE LIT LED 1X4 PANEL



PHOTOMETRICS:

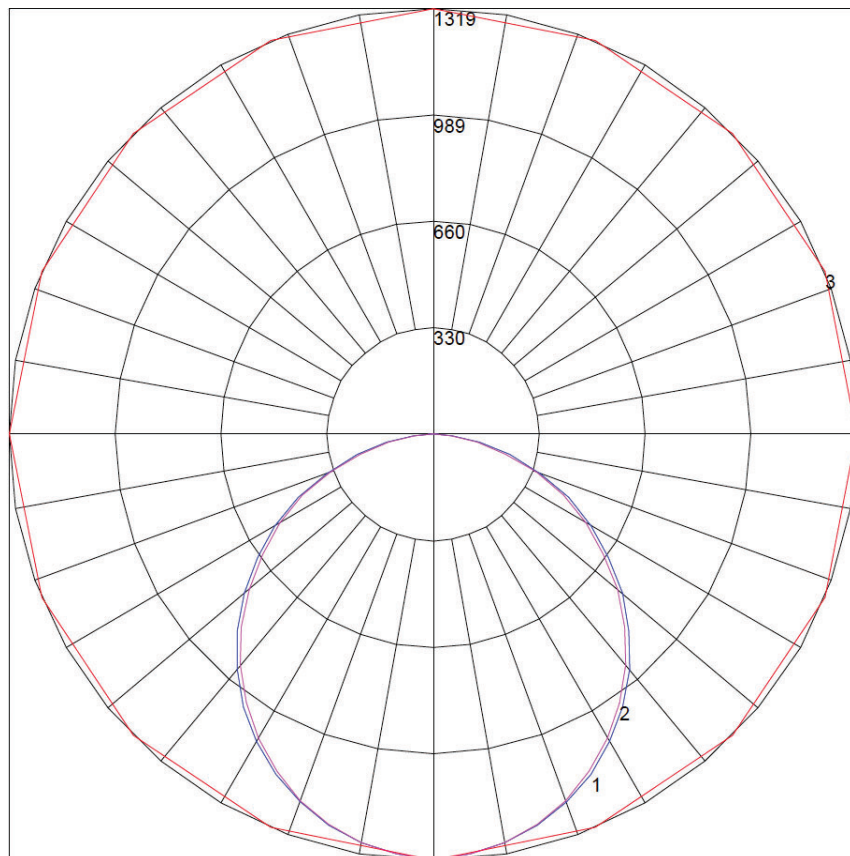

LUMINANCE DATA (cd/sq.m)

| Angle In Degrees | Average 0-Deg | Average 45-Deg | Average 90-Deg |
|------------------|---------------|----------------|----------------|
| 45 | 4497 | 4466 | 4393 |
| 55 | 4285 | 4240 | 4163 |
| 65 | 4055 | 3993 | 3915 |
| 75 | 3502 | 3417 | 3346 |
| 85 | 2621 | 2537 | 2495 |

Maximum Candela = 1319 Located At Horizontal Angle = 0, Vertical Angle = 0
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.): BLUE
 # 2 - Vertical Plane Through Horizontal Angles (90 - 270): MAGENTA
 # 3 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.): RED

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

| RC | 80 | | | | 70 | | | | 50 | | | 30 | | | 10 | | | 0 |
|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |
| 1 | 109 | 104 | 100 | 96 | 106 | 102 | 98 | 94 | 97 | 94 | 91 | 93 | 91 | 88 | 90 | 88 | 86 | 84 |
| 2 | 99 | 91 | 84 | 78 | 96 | 89 | 82 | 77 | 85 | 80 | 75 | 82 | 77 | 73 | 79 | 75 | 72 | 70 |
| 3 | 90 | 79 | 71 | 65 | 88 | 78 | 70 | 64 | 75 | 68 | 63 | 72 | 67 | 62 | 70 | 65 | 61 | 59 |
| 4 | 82 | 70 | 62 | 55 | 80 | 69 | 61 | 54 | 67 | 59 | 54 | 64 | 58 | 53 | 62 | 57 | 52 | 50 |
| 5 | 76 | 63 | 54 | 47 | 74 | 62 | 53 | 47 | 60 | 52 | 46 | 58 | 51 | 46 | 56 | 50 | 45 | 43 |
| 6 | 70 | 57 | 48 | 41 | 68 | 56 | 47 | 41 | 54 | 46 | 41 | 52 | 45 | 40 | 51 | 45 | 40 | 38 |
| 7 | 65 | 51 | 43 | 36 | 63 | 51 | 42 | 36 | 49 | 41 | 36 | 48 | 41 | 36 | 46 | 40 | 35 | 33 |
| 8 | 60 | 47 | 38 | 32 | 59 | 46 | 38 | 32 | 45 | 37 | 32 | 44 | 37 | 32 | 42 | 36 | 32 | 30 |
| 9 | 56 | 43 | 35 | 29 | 55 | 42 | 34 | 29 | 41 | 34 | 29 | 40 | 34 | 29 | 39 | 33 | 29 | 27 |
| 10 | 53 | 40 | 32 | 26 | 52 | 39 | 32 | 26 | 38 | 31 | 26 | 37 | 31 | 26 | 36 | 30 | 26 | 24 |

Lighting layouts and spacing criteria available upon request



Installation Instructions, LM-79 Testing, IES Files available online:

MaxLite®: 1-800-555-5629 | Fax: 973-244-7333 | Web: www.maxlite.com | E-mail: info@maxlite.com

