


LED SMALL ADJUSTABLE WALL PACK

SAW SERIES




13W & 26W

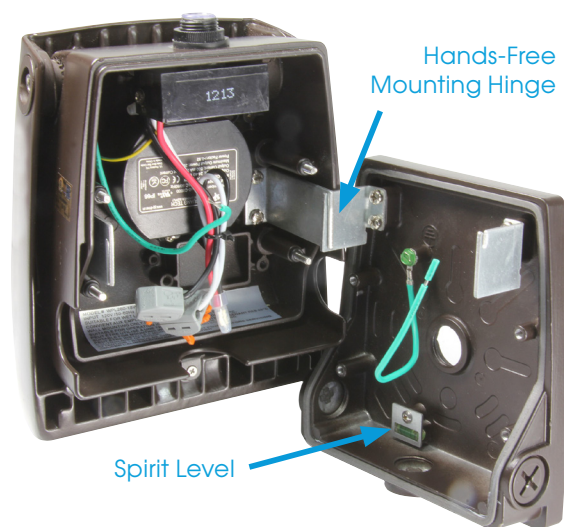

Hands-Free Mounting Hinge

Spirit Level

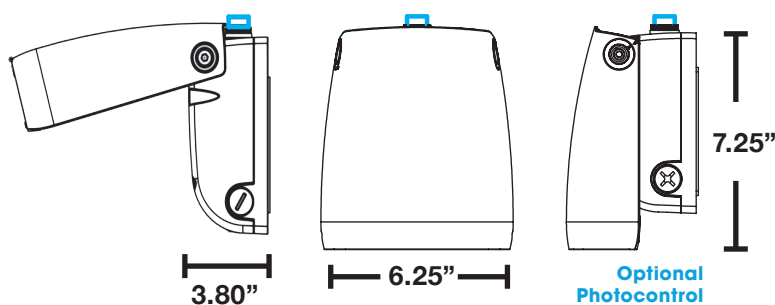

PRODUCT DESCRIPTION:

With flexible installation features and architectural-grade design, LED Small Adjustable Wall Packs offer discreet, but powerful lighting for outdoor locations. The wall packs are constructed with a fixture head that pivots up to 90 degrees, to precisely aim light while minimizing glare and backlight. Wall packs are issued unscrewed, so they are ready to install right out of the box. Backplate mounting hinges allow the fixture to hang during wiring, making ladder work easier for the installer, while an internal spirit level ensures straight mounting.

FEATURES:

- Fixture head pivots fully up to 90° from mounting plane
- Efficacy exceeding 80 lm/W translates to 75% energy savings over HID incumbents
- 70 CRI min
- Universal 120-277V power supply
- Power Factor > 0.9; THD < 25%
- 120,000-hour L70 lifetime, TM-21 standards @ 25°C

CONTROLS:

120VAC/208-277VAC Photocontrol: Voltage-specific photocontrols power the fixture when light levels reach 20 lux or below, and turn it off at 30 lux or higher. Operating temperature of -30°F-120°F. Photocell mounted externally.

CONSTRUCTION:

- Die-cast housing, durable powder coat finish
- Spirit level and backplate mounting hinges make for an easy installation

MODEL SELECTION (Full list of order codes on pg. 2)

Typical order example: SAW26U50PC27B

	U	LED50		B
FAMILY	VOLTAGE	CCT	CONTROL	FINISH
SAW13= 13W, 100W Quartz Halide equivalent SAW26= 26W, 175W Metal Halide equivalent	U= 120-277V	LED50= 5000K	(OMIT)= None, std PC12= 120V Photocontrol PC27= 277V Photocontrol	B= Bronze, std

SPECIFICATIONS:

SPECIFICATIONS:		SAW13U50B		SAW13U50BPC12		SAW13U50BPC27		SAW26U50B		SAW26U50BPC12		SAW26U50BPC27	
ITEM	SPECIFICATION	DETAILS											
GENERAL PERFORMANCE	Lumens Delivered (lm)	1165						2345					
	Efficacy (lm/W)	82						81					
	CCT	5000K											
	Lumen Maintenance (L70)	>120,000 hours											
	Color Rendering Index (CRI)	70											
ELECTRICAL	Input Power (W)	14						29					
	Power Factor	> 0.9											
	Input Voltage (V)	100-277V, 50/60Hz		100-120V, 50/60Hz		208-277V, 50/60Hz		100-277V, 50/60Hz		100-120V, 50/60Hz		208-277V, 50/60Hz	
	Lens	Sealed borosilicate glass lens											
	Housing	Aluminum											
PHYSICAL	Mounting	Gasketed back plate can be mounted to recessed outlet box or direct to surface											
	Operating Temperature	-30°F-104°F											
APPLICATION	Environment	IP66											
	Humidity	20% - 85% RH, non condensing											
	Warranty	5 Years											

ORDERING*:

ORDER CODE	MODEL	OPTIONS	EFFICACY (lm/w)	OUTPUT (LUMENS)	NOMINAL POWER (WATTS)	CCT	FINISH
74121	SAW13U50B	None	82	1165	13	5000K	Bronze
74122	SAW13U50PC12B	120V Photocontrol					
74123	SAW13U50PC27B	277V Photocontrol					
74127	SAW26U50B	None	81	2345	26		
74165	SAW26U50PC12B	120V Photocontrol					
74128	SAW26U50PC27B	277V Photocontrol					

*Please contact your MaxLite representative to order products that don't have order codes listed here.