CM405RA-S


4" LED SURFACE MOUNT FLUSH MOUNT DISK DOWNLIGHT



Fixture Type

Project

Notes

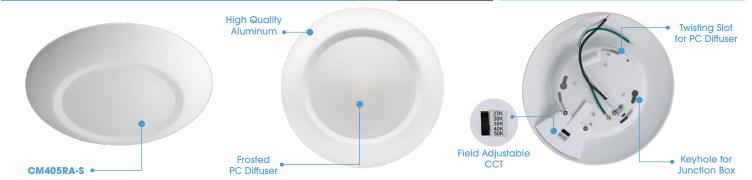

The LED Surface Mount Flush Disk Downlight series is designed for residential and commercial applications. With ultra Low profile design measures a depth of only 1-1/4" and ADA Compliant for Wall Mounting can easily installs within a standard junction box or housing. The Frosted Polycarbonate Diffuser provides comfortable non-glare lighting with no hot spots. 5-Level field-selectable Color Temperature and Triac Dimming available.





















SPECIFICATIONS

INPUT VOLTAGE	120V AC
WATTAGE	10 W
LUMENS	600 Lm
EFFICACY	60 Lm/W
CRI	90+
BEAM ANGLE	120°
DEAM ANDEL	120


 $^{^{\}rm l}$ Effectively dim down to 10% / See other compatible dimmers on the next page

DIMMING ¹	TRIAC Dimming		
ENVIRONMENT	Indoor - Dry & Wet		
CERTIFICATIONS	cETLus, T24 Compliant		
LUMEN MAINTENANCE	50,000 hours		
WARRANTY ²	5 years		

PERFORMANCE

COLOR TEMPERATURE ³	LUMEN ⁴	WATTAGE	EFFICACY	CRI
SW5 (27/30/35/40/50K) ⁵	600 Lm	10 W	60 Lm/W	90+

^{3 &}amp; 4 CCT within +/-10%



ORDERING INFO



MODEL CM405RA-S-SW5-WH



² See published warranty terms for detailed information

⁵ Switchable CCT

CM405RA-S

4" LED SURFACE MOUNT FLUSH MOUNT DISK DOWNLIGHT



Fixture Type

Project

Notes


ACCESSORIES


Optional Accessories



PART NUMBER **CM405S-MK DESCRIPTION** Adapters for 3" Junction Box


DIMENSIONAL DRAWINGS





DIMENSIONS 5-1/2" 140 mm 1-1/4" 31 mm

INSTALLATION



Each Box includes:

- 4" Disk Light
- Mounting bracket to J-Box4 J-box Screws
- 3 Wire Nuts

COMPATIBLE DIMMERS

LEVITON 6681, 6672

LUTRON

PD-6WCL, DVCL-153P, CTCL-153P, MACL-153M, TGCL-153P