
J

HV220

PAR20 GIMBAL TRACK LUMINAIRE

Туре	
Project	
Catalog No.	

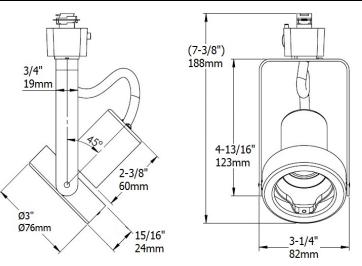

DESCRIPTION

PAR20 Halogen or LED track fixture in a minimal yet functional open gimbal ring design. Suitable for residential application or any small spaces with low mounting height.

0

CONSTRUCTION

Molded polycarbonate track fitting. Spring loaded locking tab. Steel yoke, gimbal ring and socket cover. Powder coat paint. 350° horizontal, ±90° vertical aim adjustment.

MOUNTING

Selection of three track fittings. Provides electrical and mechanical connection to single or two circuit track systems.

ELECTRICAL

Porcelain socket, E26 medium base. Integral ON/OFF switch.

DIMMING

JESCO HV220 track luminaire is compatible with most dimming protocols prevalent in the United States. Please consult lamp manufacturer for latest compatibility information.

LAMPS

Halogen or LED PAR20, E26 medium base 120V 50W max.

LINE VOLTAGE FIXTURE EXTENSION

Suspend fixtures where needed without lowering the track. Ordered separately. BK, WT

For H1 or H2 Track

H2HVFE12	12" nominal, 14.5" overall
H2HVFE18	18" nominal, 20.5" overall
H2HVFE24	24" nominal, 26.5" overall
H2HVFE36	36" nominal, 38.5" overall
H2HVFE48	48" nominal, 50.5" overall

For J1 or J2 Track (on/off switch standard)

12" nominal, 14.5" overall
18" nominal, 20.5" overall
24" nominal, 26.5" overall
36" nominal, 38.5" overall
48" nominal, 50.5" overall

LABELS

cULus Listed

WARRANTY

18 months

ORDERING INFORMA	

SYSTEM H2 = H1 or H2 Track L2 = L1 or L2 Track J2 = J1 or J2 Track	SERIES HV220		FINISH BK – Black WT – White	
	HV220			
JESCO	www.jescolighting.com support@jescolighting.com Tech Support: 855.592.0029	15 Harbor Park Drive Port Washington, NY 11050 Main Line: 800.527.7796 Fax Line: 855.265.5768	219 South 6 th Ave City of Industry, CA 91746 Main Line: 855.654.0110 Fax Line: 626.333.2955	8/31/2017
LIGHTING GROUP	Specifications subject to change w	ithout notice.		Page 1