



Туре	
Project	
Catalog No.	



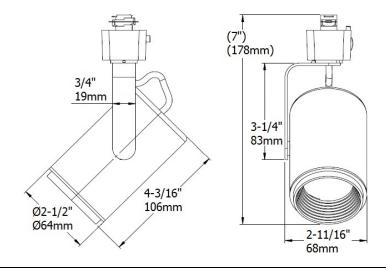

DESCRIPTION

GU10 Halogen or LED track fixture in a simple yet detailed and functional design. No visible screw or rivet. Detailed yoke with smooth transition line. Suitable for residential application or any small spaces with low mounting height.

CONSTRUCTION

Molded polycarbonate track fitting.
Spring loaded locking tab.
Steel yoke and lamp housing.
Die-cast aluminum step baffle w/ accessory holder.
Powder coat paint.
350° horizontal, ±90° vertical aim adjustment.

MOUNTING

Selection of three track fittings. Provides electrical and mechanical connection to single or two circuit track systems.

ELECTRICAL

Porcelain GU10 socket. Integral ON/OFF switch.

DIMMING

JESCO HV610 track luminaire is compatible with most dimming protocols prevalent in the United States. Please consult lamp manufacturer for latest compatibility information.

I AMPS

Halogen or LED. GU10 base 120V 50W max.

OPTICS

Accomodates 1 lens. The included clear lens should be discarded when using LED lamp for maximum heat dissipation.

LINE VOLTAGE FIXTURE EXTENSION

Suspend fixtures where needed without lowering the track. Ordered separately.

BK, WT

For H1 or H2 Track

H2HVFE12	12" nominal, 14.5" overall
H2HVFE18	18" nominal, 20.5" overall
H2HVFE24	24" nominal, 26.5" overall
H2HVFE36	36" nominal, 38.5" overall
H2HVFE48	48" nominal, 50.5" overall

For J1 or J2 Track (on/off switch standard)

 J2HVFE12
 12" nominal, 14.5" overall

 J2HVFE18
 18" nominal, 20.5" overall

 J2HVFE24
 24" nominal, 26.5" overall

 J2HVFE36
 36" nominal, 38.5" overall

 J2HVFE48
 48" nominal, 50.5" overall

LABELS

cULus Listed

WARRANTY

18 months

ORDERING INFORMATION				
SYSTEM H2 = H1 or H2 Track L2 = L1 or L2 Track J2 = J1 or J2 Track	SERIES HV610	FINISH BK - Black WT - White		



www.jescolighting.com support@jescolighting.com **Tech Support:** 855.592.0029

HV610

15 Harbor Park Drive Port Washington, NY 11050 **Main Line:** 800.527.7796 219 South 6th Ave City of Industry, CA 91746 **Main Line:** 855.654.0110 **Fax Line:** 626.333.2955

9/1/2017