

LED PAR38



The PAR38 is a highly efficient LED lamp that uses only 20 watts of energy, significantly reducing your carbon footprint while maintaining a very high quality of light. The SKR3820 features industry leading light output, making it ideal for recessed and architectural residential, retail, office space and hospitality applications.

PROJECT NAME
CATALOG NUMBER
NOTES
FIXTURE TYPE

FEATURES:

- 120V / 60Hz
- 40,000 hour life at L70 standards
- CRI: >80
- Solid aluminum housing for thermal heat protection
- High output COB chip
- Five year limited warranty
- Dimmable down to five percent
- Suitable for damp locations
- Operating temperature range: -4° to 113° F
- Not for use in totally enclosed luminaires

CONSTRUCTION:

LEDs: The LED PAR38 features a COB LED package, which offers high uniformity and intensity of light with superior thermal performance.

Housing: The body of each lamp is solid aluminum and engineered to efficiently remove heat from the LED package.

Base: The PAR38 has a standard E26 base.



Lamp Ordering Information:

Watts	Order Number	Model Number	Incandescent Equivalent	Lumens	CBCP	Beam	Lamp Life (Hrs.)	Dimensions (W"xH")	CCT
* 20	71761	SKR3820DLED30-136	100	1200	2050	40°	40,000	4.75" x 5"	3000
* 16	72224	SKR3816DLED30-136	75	950	1770	40°	40,000	4.75" x 5"	3000
16	72225	SKR3816DLED50-136	75	1020	1930	40°	40,000	4.75" x 5"	5000
16	72226	SKR3816SPDLED30-136	75	950	6700	15°	40,000	4.75" x 5"	3000

Max12188

*ENERGY STAR Qualified

Lighting layouts and spacing criteria available upon request



MaxLite®: 1-800-555-5629 | Fax: 973-244-7333 | Web: www.maxlite.com | E-mail: info@maxlite.com


Revised: 06-17-14

LED PAR38

COMPATIBLE DIMMERS:

Manufacturer	Model#
Lutron	D-600 PH-DK
Lutron	TG-603PGH
Lutron	CTCL-153PDH
Lutron	S600PR-WH
Leviton	C20-6681-IW

DIMENSIONS:

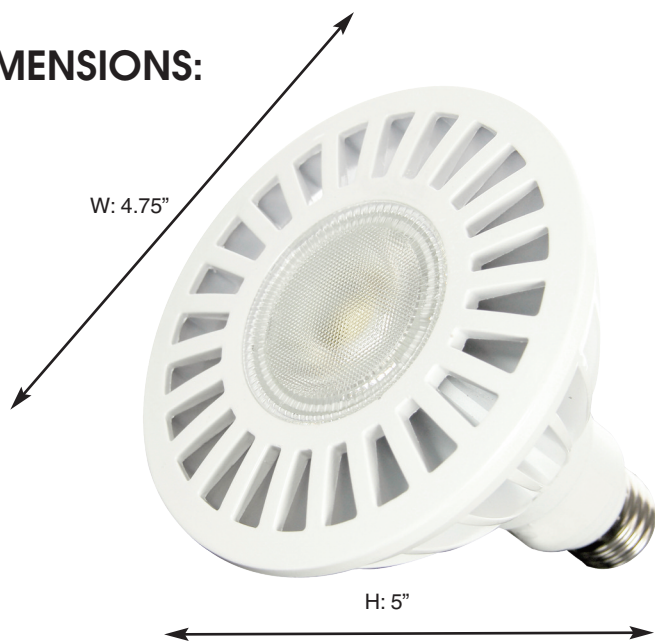

Lighting layouts and spacing criteria available upon request

MaxLite®: 1-800-555-5629 | Fax: 973-244-7333 | Web: www.maxlite.com | E-mail: info@maxlite.com

Revised: 06-17-14

